

FILTER CARTRIDGE HOUSING

FCH-Tr-2505/ 2509 / 2520

FCH - Tr - 2505	5" Length	Art.Nr. 495 115
FCH - Tr - 2509	9 3/4" Length	Art.Nr. 495 120
FCH - Tr - 2520	20" Length	Art.Nr. 495 125



Material : Head Plastic PP
Housing Plastic SAN transparent

Connection Inlet 1" BSP
Outlet 1" BSP

Type	FCH-Tr-2505	FCH-Tr-2509	FCH-Tr-2520
Flow max.:	0,5 m ³ /h	1,5 m ³ /h	2,5 m ³ /h
oper. pressure max.:	8 bar	8 bar	8 bar
Weight empty:	0.3 kg	0.4 kg	0.6 kg
Temperture max.:	35°C	35°C	35°C
Length over all:	185 mm	295 mm	575 mm
Diameter max.:	122 mm	122 mm	122 mm
Cartridgefilter type D.x L. :	2,5 x 5"	2,5 x 10"	2,5 x 20"

Version: - incl. aereation - valve
- incl. Brass-thread-inlet

Options : - Spanner
- holding device on demand

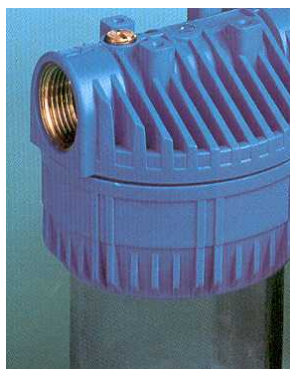

INAQUA