


FILTERCARTRIDGES

FC 25xx – N90

- melt blown polypropylen filtercartridge
- with depth filtration
- made from FDA approved polypropylen without additions or binders
- with internal core made from polypropylen
- optional different end cape types


for the filtration

- in watertreatment
- in the food and beverage industry
- in the biotechnology
- in elektronik and nuklear industrie
- for petrochemical industrie
- in the galvanic industrie
- for fine chemicals

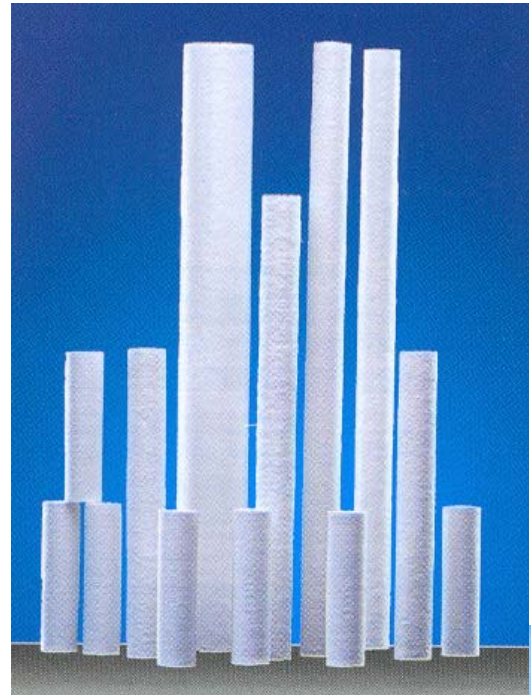

Length	9 3/4"	20"	30"	40"
	(248 mm)	(508 mm)	(762 mm)	(1016 mm)
End Cape Type	DOE, Code 3, Code 7, Code 8			
Sealings	Buna N, Silicone or Viton			
Filterfiness	1, 5, 10, 20, 50 micron			
Filtrationefficiency	90%			
max. Pressure	6 bar			
max. Temperatur	80°C			
Outsidediameter	2,5" / 63mm			
Insidediameter	28 mm			

Initial-Differentialpressure 0,15 bar
max. Differentialpressure 0,8 bar

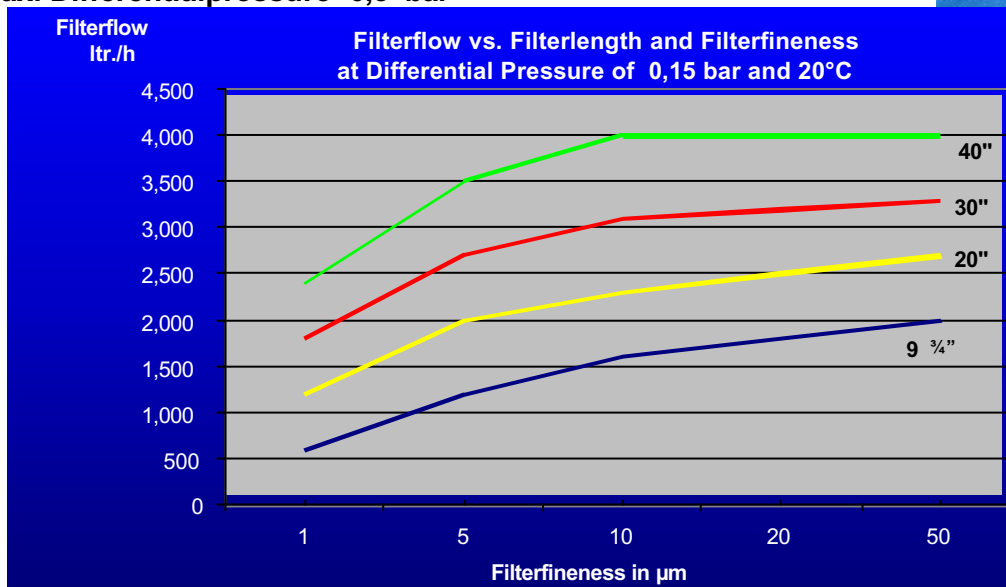

Technical changes possible. Data given not to understand as warranty figures