

FILTERCARTRIDGE

FILTER ONE FC 55xxFO



- high performance filtercartridge with excellent rejections
- best for pretreatment in membranesystems
- low operatingcost because of long life time
- high reduction of SDI

FILTERCARTRIDGE Type FC 5520 FO

Type	Filterfineness	Flow*	Art.No.
FC 5523 FO - 1	10 - 1 μm	8 m ³ /h	490 330
FC 5523-FO - 5	20 - 5 μm	15 m ³ /h	490 331
FC 5523 FO - 20	50 - 20 μm	25 m ³ /h	490 332

*at initial differential pressure of 0,15 bar




Diameter	outside	5,5" (140 mm)
	inside	4" (105 mm)
Length		23" (585 mm)
nominal Rejection		95%
max. Temperature		80 °C

FILTERCARTRIDGE Type FC 5540 FO

Type	Filterfineness	Flow*	Art.No.
FC 5540 FO -1	10 - 1 μm	16 m ³ /h	490 333
FC 5540 FO -5	20 - 5 μm	30 m ³ /h	490 334
FC 5540 FO -20	50 - 20 μm	50 m ³ /h	490 335

*at initial differential pressure of 0,15 bar

Diameter	outside	5,5" (140 mm)
	inside	4,5" (105 mm)
Length		40" (1016 mm)
nominal Rejection		95%
max. Temperature		80 °C

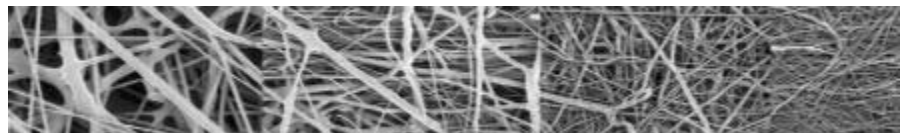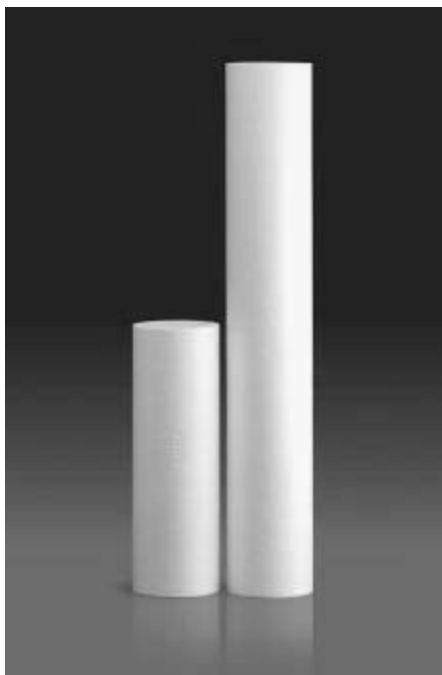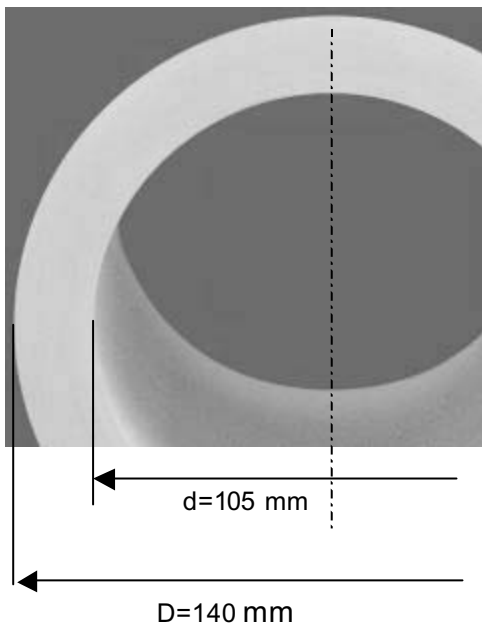

Distribution by:
INAQUA Vertriebsgesellschaft mbH
 Langmaar 7
 D-41238 Mönchengladbach
 Tel ++49 (0) 2166 621 99 0
 Fax ++49 (0) 2166 621 99 26

INAQUA
 Vertriebsgesellschaft mbH