


## FILTERCARTIDGES

### FC 25xx / 40xx – PESE

- pleated polyester- filtercartridge
- with internal core made from polypropylene
- with filterfiness of 15 µm

for the filtration  
- in watertreatment

<b>Material</b>	<b>Polyester</b>		
<b>Length</b>	<b>9 ¾"</b> (248 mm)	<b>20"</b> (508 mm)	<b>30"</b> (762 mm)
<b>Adapter</b>	<b>DOE</b>		
<b>Filterfiness</b>	<b>15 micron</b>		
<b>Filtrationefficiency</b>	<b>85%</b>		
<b>max. Pressure</b>	<b>6 bar</b>		
<b>max. Temperatur</b>	<b>52 °C</b>		
<b>Outsidediameter</b>	<b>25 xx</b> <b>40xx</b>	<b>2,5" / 63mm</b> <b>4" / 120 mm</b>	
<b>Insidediameter</b>	<b>28 mm</b>		
<b>Initial-Differentialpressure</b>	<b>0,15 bar</b>		
<b>max. Differentialpressure</b>	<b>0,8 bar</b>		

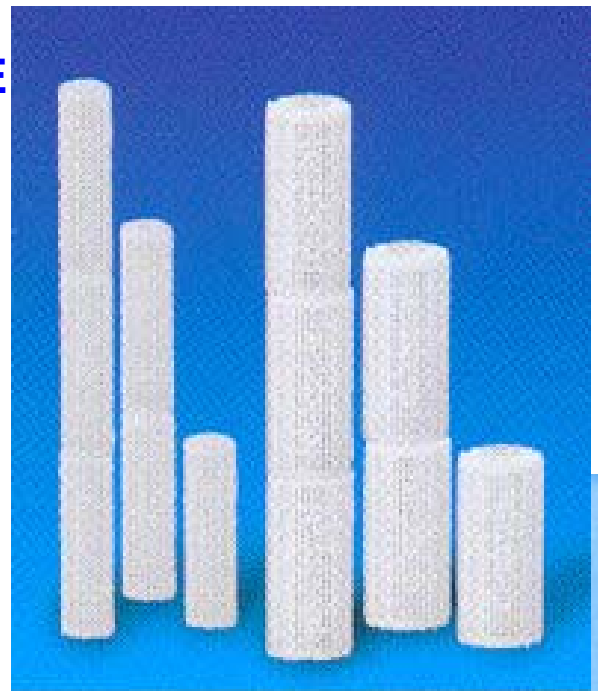

Type	Flow*	
	Ltr/ h	Flow max. Ltr./h
FC 2509 PESE 15	2000	4000
FC 2520 PESE 15	3600	5000
FC 2530 PESE 15	4200	5000
FC 2540 PESE 15	5000	6000
FC 4009 PESE 15	1800	2500
FC 4020 PESE 15	2500	3500
FC 4030 PESE 15	2800	4000

\* at 0,15 bar differeential pressure and 20 °C

Technical changes possible. Data given not to understand as warrantyfigures