


FILTERCARTRIDGES

FC 25xx – GAC

- granulated active carbon filtercartridge
- with internal core
- with filterfiness of 50 µm

for the filtration

- in watertreatment
- in the food and beverage industry
- in the biotechnology
- in elektronik and nuklear industry

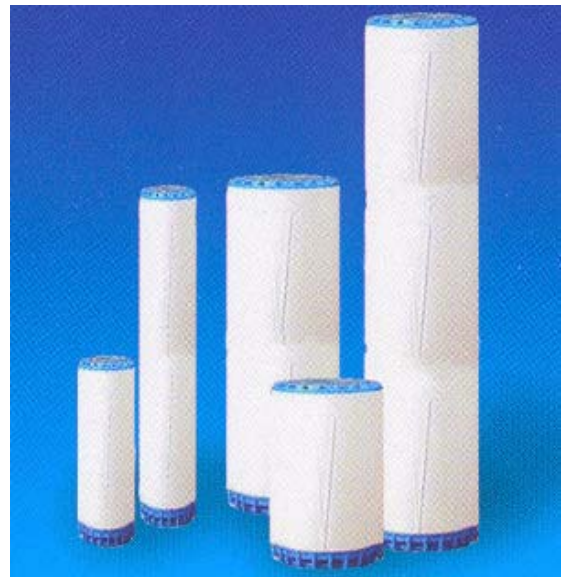

Material granulated active carbon

Length 9 ¾" 20"
(248 508 mm)

Filterfiness 50 micron

Filtrationefficiency 95%


max. Pressure 6 bar
max. Temperatur 52 °C

Outsidediameter 2,5" / 63mm
Insidediameter 28 mm

Initial-Differentialpressure 0,15 bar
max. Differentialpressure 0,8 bar

Type	Flow Ltr/ h	Cl ₂ –Capacity mg CL ₂ x m ³	Flow max. Ltr./h	Diff. pressure bar at flow of
FC 2509 GAC	250*	30	700	0,25 bei 400 ltr/h
FC 2520 GAC	450*	60	700	0,25 bei 900 ltr/h

* at 0,15 bar differential pressure and 20 °C

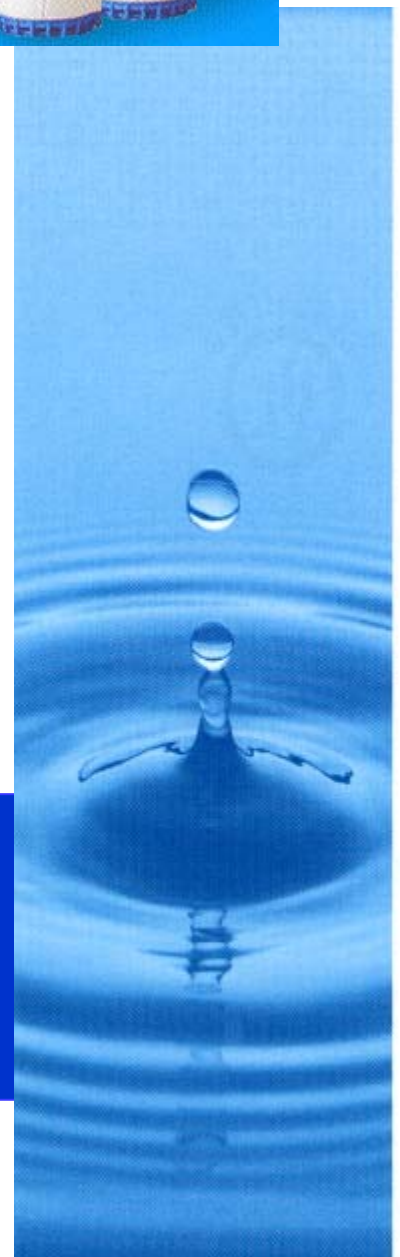

Technical changes possible. Data given not to understand as warrantyfigures