


FILTERCARTRIDGES FC 40xx – GAC

- granulated active carbon filtercartridge
- with internal core
- with filterfiness of 50 µm

for the filtration

- in watertreatment
- in the food and beverage industry
- in the biotechnology
- in elektronik and nuklear industry

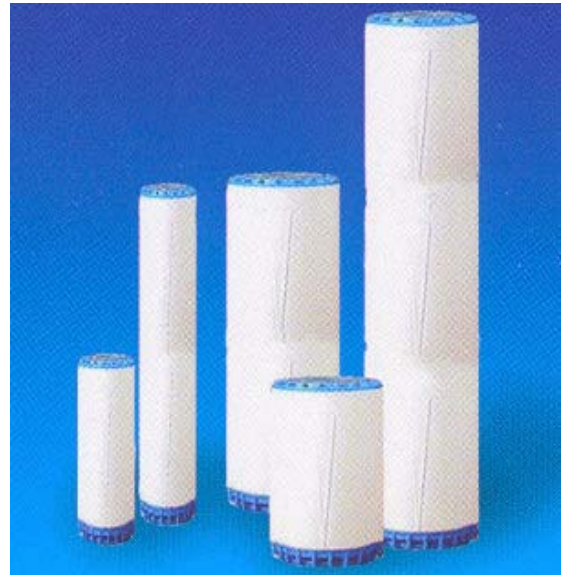

Material granulated active carbon

Length 9 ¾ 20" 30"
(248 508 768 mm)

Filterfiness 50 micron

Filtrationefficiency 95%

max. Pressure 6 bar
max. Temperatur 52 °C

Outsidediameter 4 " / 120 mm
Insidediameter 28 mm

Initial-Differentialpressure 0,15 bar
max. Differentialpressure 0,8 bar

Type	Flow Ltr/ h	Cl ₂ –Capacity mg CL ₂ x m ³	Flow max. Ltr./h	Diff. pressure bar at flow of
FC 4009 GAC	450*	170	1.500	0,25 bei 900 ltr/h
FC 4020 GAC	900*	340	2.000	0,25 bei 1.400 ltr/h
FC 4030 GAC	1200*	510	2.500	0,25 bei 1.800 ltr/h

* at 0,15 bar differential pressure and 20 °C

Technical changes possible. Data given not to understand as warranty figures