


FILTERCARTRIDGES

FC 25xx – PAC

- pleated active carbon / polyester filtercartridge
- with internal core
- with filterfiness of 10 µm

for the filtration


- in watertreatment
- in the food and beverage industry
- in the galvanic industry

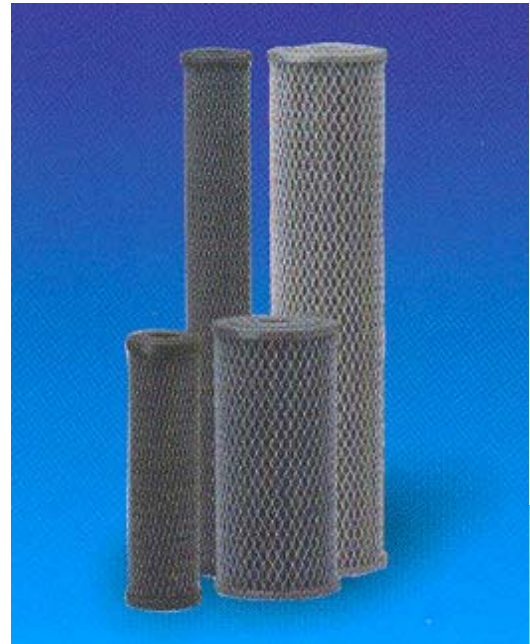

Material	pleated active carbon / polyester
Length	9 ¾" 20" (248 508 mm)
Adapter	DOE / Dicht. B
Filterfiness	10 micron
Filtrationefficiency	85%
max. Pressure	6 bar
max. Temperatur	65 °C
Outsidediameter	2,5" / 63mm
Insidediameter	28 mm
Initial-Differentialpressure	0,15 bar
max. Differentialpressure	0,8 bar

Type	Flow Ltr/ h	Flow max. Ltr./h	Diff. pressure bar at flow of
FC 2509 PAC	660*	1500	0,25 at 1000 ltr/h
FC 2520 PAC	1200*	3000	0,25 at 2500 ltr/h

* at 0,15 bar differential pressure and 20 °C

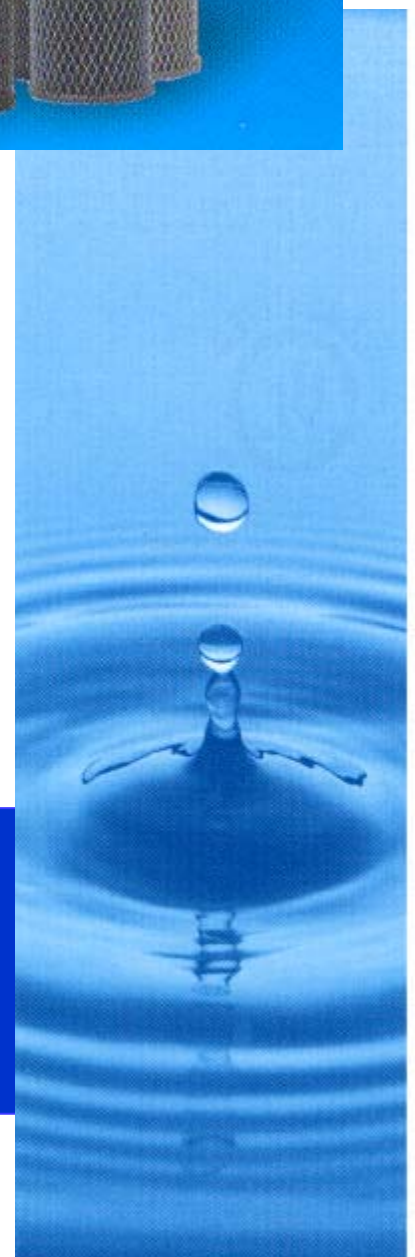

Technical changes possible. Data given not to understand as warranty figures