



DOWEX UPCORE Mono A-625

A Uniform Particle Size, Strong Base Anion Exchange Resin Specifically Designed for Layered Anion Beds in the UPCORE System

Product	Type	Matrix	Functional group
DOWEX* UPCORE* Mono A-625	Type 1 strong base anion	Styrene-DVB, gel	Quaternary amine

Guaranteed Sales Specifications		Cl ⁻ form
Total exchange capacity, min.	eq/l	1.3
	kgr/ft ³ as CaCO ₃	28.4
Water content	%	47 - 54
Bead size distribution [†]		
Mean particle size	µm	670 ± 50
Uniformity coefficient, max.		1.1
>850µ, max.	%	5
<300µ, max.	%	0.5
Whole uncracked beads, min.	%	95

Typical Physical and Chemical Properties		Cl ⁻ form
Total swelling (Cl ⁻ → OH ⁻)	%	20
Particle density	g/ml	1.09
Shipping weight	g/l	690
	lbs/ft ³	43

Recommended Operating Conditions	
Maximum operating temperature:	
OH ⁻ form	60°C (140°F)
Cl ⁻ form	100°C (212°F)
pH range	0-14
Bed depth, min.	800 mm (2.6 ft)
Pressure drop design, max.	1.5 bar (22 psi)
Pressure drop, max.	2.5 bar (37 psi)
Flow rates:	
Service/fast rinse	5-60 m/h (2-24 gpm/ft ²)
Regeneration/displacement rinse	4-10 m/h (1.6-4 gpm/ft ²)
Total rinse requirement	2-4 Bed volumes
Regenerant	2-5% NaOH
Organic loading, max.	3 g KMnO ₄ /l resin

[†]For additional particle size information, please refer to the Particle Size Distribution Cross Reference Chart (Form No. 177-01775/CH 171-476-E).

*Trademark of The Dow Chemical Company

DOWEX

Ion Exchange Resins

For more information about DOWEX resins,
call Dow Liquid Separations business:

North America 1-800-447-4369
Latin America (+55) 11-5188-9345
Europe (+31) 20-691-6268
Japan (+81) 3-5460-2100
Australia (+61) 2-9776-3226
<http://www.dow.com/liquidseps>

Typical properties and applications:

DOWEX* UPCORE* Mono A-625 strong base anion resin is a uniform particle size, gellular, type I anion resin designed for use in the UPCORE counter-current regeneration packed bed system. The particle size is specially selected to maintain excellent separation in layered beds when used with DOWEX UPCORE Mono WB-500 weak base anion resin.

The absence of large beads in DOWEX UPCORE Mono A-625 resins results in high operating capacity and good resistance to silica fouling.


DOWEX UPCORE Mono A-625 resin has an excellent resistance to mechanical and osmotic stress which helps minimize resin attrition.

Packaging

25 liter bags or 5 cubic feet fiber drums.

Figure 1. Pressure Drop Data

Temperature = 20° C (68° F)

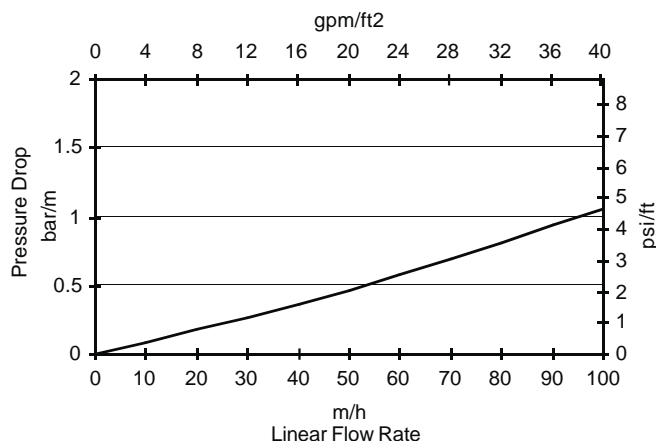

For other temperatures use:

$$P_T = P_{20^\circ\text{C}} / (0.026 T_{\text{C}} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68^\circ\text{F}} / (0.014 T_{\text{F}} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

Published September 1998.

