



DOWEX MR-3 LC NG

A Mixed Ion Exchange Resin for Demineralization in Nuclear and High Purity Demineralization Water Applications

Product	Resin Ratio	Matrix	Functional group
DOWEX* MR-3 LC NG	1:1 by equivalents cation:anion	Styrene-DVB, gel	Sulfonic acid and quaternary amine

Guaranteed Sales Specifications		OH ⁻ form	H ⁺ form
Total exchange capacity, min.	eq/l	1.2	2.0
	kgr/ft ³ as CaCO ₃	26.2	43.7
Water content	%	60 max.	46 - 52
Bead size distribution [†]			
>1.2 mm, max. (16 mesh)	%	2	2
<0.42 mm, max. (40 mesh)	%	1	1
<0.3 mm, max. (50 mesh)	%	0.2	0.1
Whole uncracked beads, min.	%	95	95
Crush strength			
Average, min.	g/bead	350	500
>200 g/bead, min.	%	95	-
>300 g/bead, min.	%	-	95

Ionic Conversions						H ⁺				
Cation resin						99.7%, min.				
Anion resin	OH ⁻	Cl ⁻	CO ₃ ⁻	SO ₄ ⁼						
	95% min.	0.1% max.	5% max.	0.1% max.						
Trace metals, ppm dry resin, max.										
	Na	Fe	Cu	Al	Mg	Ca	Co	Pb	Hg	Heavy Metals (as Pb)
Cation	50	50	10	50	50	50	30	10	10	10
Anion	40	50	10	50	50	50	30	10	10	10

Typical Physical and Chemical Properties		OH ⁻ form	H ⁺ form
Particle density	g/ml	1.08	1.22
Shipping weight	g/l	720	
	lbs/ft ³	45	

Recommended Operating Conditions	
Maximum operating temperature	60°C (140°F)
pH range	0-14
Bed depth, min.	800 mm (2.6 ft)

[†]For additional particle size information, please refer to the Particle Size Distribution Cross Reference Chart (Form No. 177-01775/CH 171-476-E).

*Trademark of The Dow Chemical Company

DOWEX

Ion Exchange Resins

For more information about DOWEX resins,
call Dow Liquid Separations business:

North America 1-800-447-4369
 Latin America (+55) 11-5188-9345
 Europe (+31) 20-691-6268
 Japan (+81) 3-5460-2100
 Australia (+61) 2-9776-3226
<http://www.dow.com/liquidseps>

Typical properties and applications:

DOWEX* MR-3 LC NG ion exchange resin is a 1:1 equivalent mixture of DOWEX HGR NG (H) cation and DOWEX SBR LC NG (OH) anion resins. This mixed resin product consists of high purity cation and anion components to enable high quality water production in nuclear applications. Residual chloride and sulfate levels are each less than

0.1% of the total ionic sites of the anion resin.


DOWEX MR-3 LC NG resin may be used in a variety of applications, including:

- radwaste treatment
- pond water treatment
- reactor coolant cleanup
- high purity mixed bed demineralization

Packaging

50 liter or 5 cubic feet fiber drums.

Figure 1. Pressure Drop Data

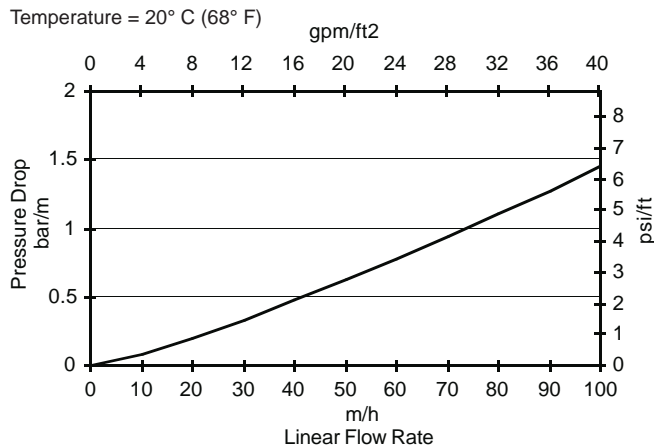

For other temperatures use:

$$P_T = P_{20^\circ\text{C}} / (0.026 T_{\text{C}} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68^\circ\text{F}} / (0.014 T_{\text{F}} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

Published September 1998.

