


DUPLEX – SOFTENING DSP - CL

with Central Control Valves Clack WS1 CI



Type	Capacity
DSP 25 – CL	100 °dH x m ³
DSP 50 – CL	200 °dH x m ³
DSP 75 – CL	300 °dH x m ³
DSP 100 – CL	400 °dH x m ³

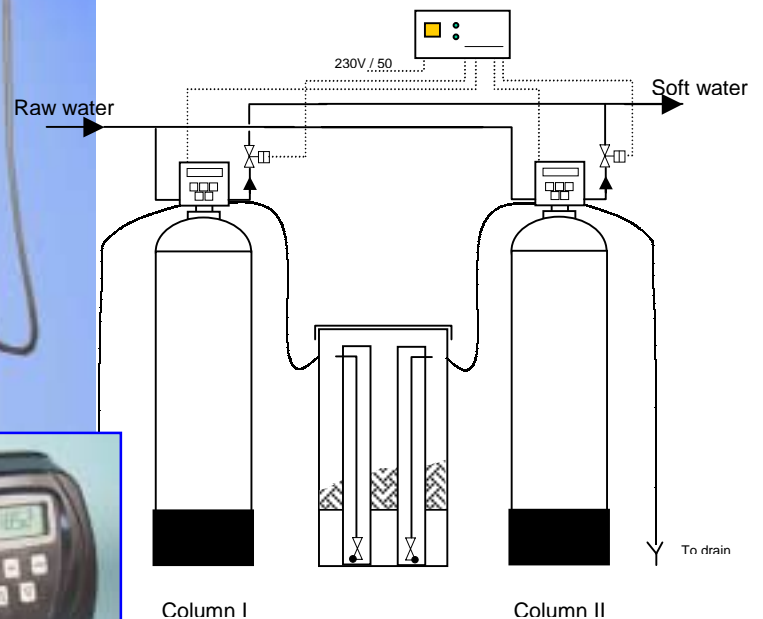

- high plant reliability because of two independent volumecontrolled central control valves
- throughput up to 6 m³/h at DUPLEX – operation
- changable from DUPLEX – inline operation to MONEX – parallel operation
- display Column I or Column II in service
- easy electrical connection –input 230 V / 50 Hz at operation 24 V / 50 Hz
- up to nine free-programmable regeneration steps per column
- valvedesign realize optimal throughput and backwash flows
- modulare strong design without screws
- easy maintanance and operation, low spare stockage